

| |
|----------------|
| Catalog Number |
| Notes |
| Type |



ILLUMINATION

- Ultra-bright, energy-efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Premium-grade, die-cast aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

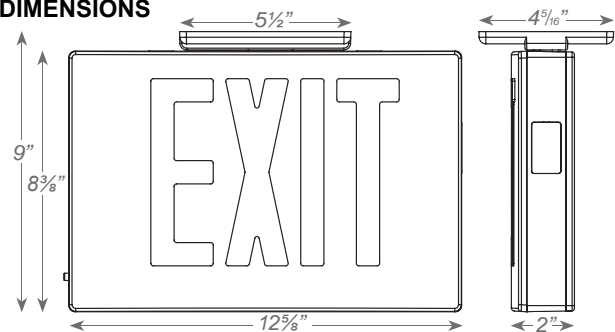

Sample Part Number: **DAE1RBAEM**

ORDERING INFORMATION

Special voltage options available.

| MODEL | No. of FACES | LETTER COLOR | HOUSING COLOR | FACE PANEL | BATTERY | OPTIONS |
|-------|--------------|--------------|---------------|------------|---------|---|
| DAE | 1 | R Red | W White | W White | (blank) | SDT Self-Diagnostics ¹ |
| | 2 | G Green | B Black | B Black | EM | 2C Dual Circuit Operation ² |
| | 3 | | A Aluminum | A Aluminum | | TP Tamper-Proof USA Assembled in USA |

¹ Available only with EM units.

² Available only with AC units.