

## Die-cast Aluminum LED Unit (AC/EM)

Catalog Number
Notes
Type



### ILLUMINATION

- Long-lasting, efficient, ultra-bright white LEDs.
- 12.0 watts (2 LEDs x 6.0 watt) per unit.
- Mirror-bright reflector and prismatic polycarbonate refractors.
- Can be used as a Normally-ON or Normally-OFF luminaire as well as on a switched circuit.
- Dissipates 1286 lumens in AC mode and 350 lumens in DC mode.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Self-diagnostic feature performs monthly, bi-annual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- Photocell control sensor included as standard for use as dusk-to-dawn luminaire.
- Field-selectable wiring allows for AC operation of unit to be controlled using a wall-switch, photocell, or other switching mechanism.

### MOUNTING

- Universal knockout pattern on back plate for wall mount.
- Threaded opening at the top of the enclosure for conduit mount.

### HOUSING

- Decorative, low profile, architectural design. Die-cast aluminum housing
- Durable powder-coated finishes in white, black, nickel and dark bronze finish.
- Sealed and gasketed.


### OPTIONS

- CW: Optional internal heater for extreme cold temperature applications ( -30°C - 50°C).
- CEC: Certified to CEC under Title 20 Regulations.

### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (0°C – 50°C).

### DIMENSIONS

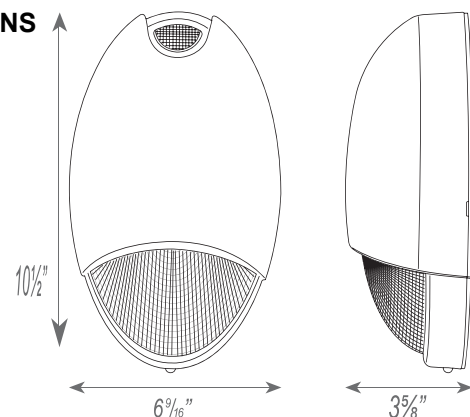

### ORDERING INFORMATION

Sample Part Number: **DAUBZSDTPC**

DAU		SDT				OPTIONS		PC	
MODEL	HOUSING COLOR	STANDARD FEATURE		STANDARD FEATURE		STANDARD FEATURE		STANDARD FEATURE	
DAU	Diecast Aluminum LED Unit	W	White	SDT	Self-Diagnostics	CW	Cold Weather	PC	Photocell Sensor
	B	Black	CEC			Title 20 Compliant			
	BR	Dark Bronze							
	N	Nickel							