


| |
|----------------|
| Catalog Number |
| Notes |
| Type |

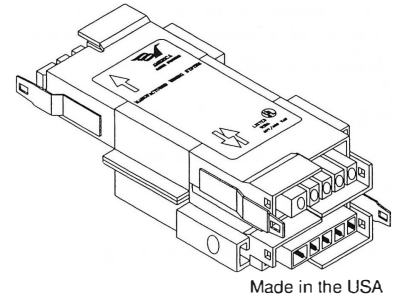

Made in the USA

APPLICATION

Designed with one "power-in" port and two "power-out" ports, the Splitter makes it possible to split a single cable run into two directions.

COMPONENT INFORMATION

| Catalog #'s | Description |
|------------------|---------------------------------|
| 120 Volts | |
| ISPB-R | Single circuit, 3-wire w/ground |
| ISPC-R | Two circuit, 4-wire w/ground |
| 277 Volts | |
| 2SPB-R | Single circuit, 3-wire w/ground |
| 2SPC-R | Two circuit, 4-wire w/ground |

FEATURES

- Rated for use on 20 ampere branch circuits.
- Designed with one "power-in" port and two "power-out" ports.
- Internally wired with 90° C insulated, #12 AWG, solid copper conductors and a #12 AWG insulated, solid copper ground.
- Connector housing is zinc-plated .060 inches cold-rolled steel.
- Pin and socket connector design.
- To eliminate inter-voltage connection, each connector is keyed and color coded to meet specific voltage requirements.
- IBEW Assembled, UL listed and labeled.
- Meets requirements of NEC® Article 604.
- Acceptable for use in environmental air-handling spaces other than ducts or plenum's per NEC Article 300-22(c).


ORDERING INFORMATION

Example: 2SPC-R

| | | | |
|--|--|---|--|
| <p>Voltage</p> <p>1 - 120V 2 - 277V</p> | <p>SP</p> <p>Function</p> <p>SP - Splitter</p> | <p>No. of Wires</p> <p>A - 1 circuit, 2-wire w/ ground B - 2 circuit, 3-wire w/ ground C - 3 circuit, 4-wire w/ ground</p> | <p>-R</p> <p>Type</p> <p>-R - Reverse Splitter</p> |
|--|--|---|--|

| | |
|--|--|
| Weight | 1.0 Pound |
| Minimum Coil Diameter | 9 inches (inner diameter) |
| Conductors Conductor Conductor Size Ground Conductor | Copper, solid, 90°C, THHN 12 AWG 12 AWG, copper, solid |
| Contact | 0.016" tinned copper alloy |
| Contact Housing Material Keying | Polycarbonate, UL 94V-2 Complies with NEC 604-6(b) |
| Connector Housing Material Plating Attaching Hardware | 0.060" cold-rolled steel Zinc bright dip Rivet, steel, zinc plated |
| Latch | #3 zinc alloy, die cast |
| Latch Strike Material Plating | 0.028 AISI 1075 cold-rolled spring steel Black oxide |

KEY DIMENSIONS

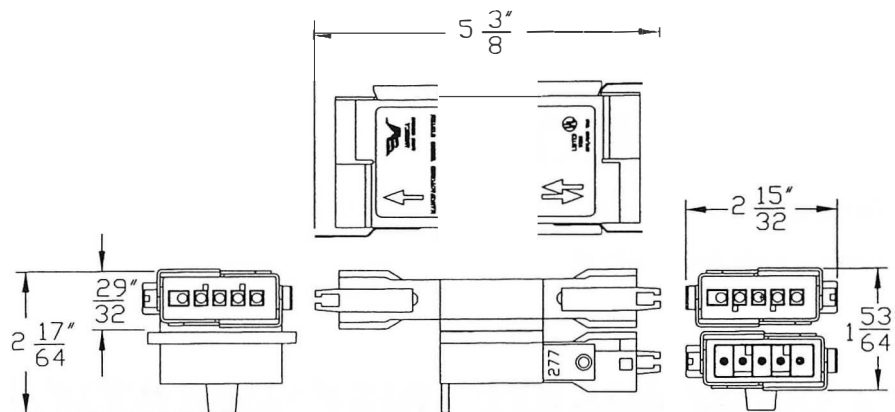

SYSTEM VIEW

