

| |
|----------------|
| Catalog Number |
| Notes |
| Type |



ILLUMINATION

- Ultra-bright, energy-efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Universal knockout pattern on back provided with gasket for watertight seal for back mount.

Polycarbonate mounting canopy included for top or end mount.

HOUSING

- Housing is reinforced polycarbonate construction in white, gray or black finish.
Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- Knockouts provided for conduit feed applications.
- EZ snap-out chevron directional indicators.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C-120V/2C-277V: Voltage-specific dual circuit option on the AC-only unit enables it to be connected to two different supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Batteries prorated for five years.
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- IP66 rated for Ingress protection.
- Rated for Class 1, Division 2, Groups A,B,C, & D.
- Certified to CEC under Title 20 Regulations.
- UL listed for wet locations (-20°C – 50°C).

DIMENSIONS

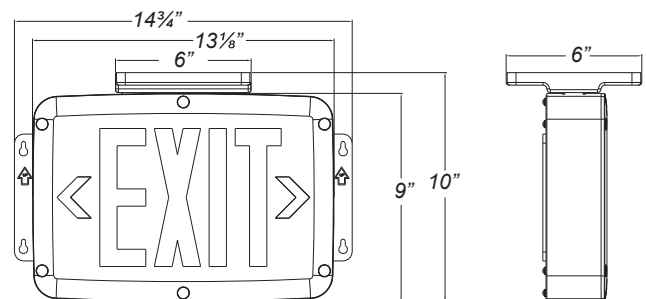

ORDERING INFORMATION

Sample Part Number: HLE1RBEM-SDT

¹ Available only with EM units.

² Available only with AC units.

| MODEL | No. of FACES | LETTER COLOR | HOUSING COLOR | BATTERY | OPTIONS |
|-------|--------------|--------------|---------------|-----------------|---|
| HLE | 1 | Single | R Red | (blank) | SDT Self-Diagnostics ¹ |
| | 2 | Double | G Green | AC-Only | Dual Circuit With 120V Input ² |
| | | | | EM NiCd Battery | Dual Circuit With 277V Input ² |
| | | | | | TP Tamper-Proof |