

| |
|----------------|
| Catalog Number |
| Notes |
| Type |



Centralized
Lighting Inverter

APPLICATION

- Operates LED, incandescent, magnetic and electronic ballast fluorescent, high power factor compact fluorescent and high intensity discharge (HID) luminaries.
- Schools, Sports Facilities, Universities, Mass Transit, Warehouses.
- Provides conditioned, uninterruptible power for other types of critical loads.
- Consult factory for non-lighting load applications.

SAFETY LISTINGS

- UL 924 Emergency Lighting Equipment
- UL 924 Auxiliary Lighting Equipment
- NFPA 101
- NFPA 111

WARRANTY

- Standard warranty: (requires execution of factory start-up within 120 days of shipment) BritePath will provide parts and on-site labor for the first 12 months following start-up of the product, and parts only for an additional 12 months. If factory start-up is not executed within 120 days of shipment, BritePath will provide a parts warranty for 24 months from the date of shipment.
- Extended warranty available: consult factory for extended warranty and service option.

DESIGN

- Free standing, NEMA 1 enclosure with lockable control access panel.
- Double conversion, no interruption output.
- Solid state pulse width modulated inverter.
- Internal, automatic static bypass switch.
- Internal, make before break maintenance by-pass.
- Standard, UL 924 compliant, 90 minute battery back up.
- Microprocessor control and diagnostic system.
- LCD color touch screen display.
- User programmable automatic testing.
- RS 232 Communications Port.
- Fault annunciating local audible alarm.
- Normally open contacts for status & alarm communications
- Current limiting start sequence.
- Automatic low battery voltage disconnect.
- Optional output circuit breakers and circuit breakers with trip alarm
- Optional normally off load with time delay.
- Optional Web Based Communications.
- Optional Seismic certification.
- Optional Remote Annunciator.
- 87% throughput efficiency, 85% emergency efficiency.
- Operating temperature range 32°F (0°C) to 104°F (40°C)1.
- Storage temperature -4°F (-20°C) to 122°F (50°C).
- Fault current rating 42 kAIC.
- Audible noise less than 50 dB at 3 ft on "A" weighted scale.

ORDERING INFORMATION

Example: PSU B10.0S N5NXB20 W

| | | | | | | | | |
|--|------------------|--------------------------|-------------------------|-------------------------|------------------------------------|---|----------------------------------|--|
| PSU | 10.0 | | | | | | | |
| Series | Unit Size | Battery Time | OCB Distribution | OCB Distribution | Seismic Rated | WebBased Communications | Remote Status | |
| PSU – BritePath Lighting, Single Phase Inverter System | 10.0 – 10.0kVA | S – 90 min R – Other* | EXAMPLE: N 5 N X B 20 | (IF NEEDED) | Z – Seismic Rated (blank) – N/A | W – TCP/IP Modbus TCP Modbus RS45 BACnet / IP BACnet MS / TP (blank) – N/A | R – Annunciator (blank) – N/A | |
| Vin / Vout | | | | | | | | |
| B – 277Vin - 277Vout | | | | | | | | |
| C – 277Vin - 120/277Vout | | | | | | | | |
| D – 120/240Vin - 120/240Vout | | | | | | | | |
| E – 120/208Vin - 120/208Vout | | | | | | | | |

| OUTPUT TYPE | BREAKER(s) | Trip Alarm | Pole | Volts | Amps |
|--------------------|------------|----------------------------|-------|-------|-------|
| N-NORMAL ON | 0-20 | N-No Alarm (up to 20) | X-1P | A-120 | 15 |
| T-TIMED NORMAL OFF | | A-Trip Alarm (up to 10) | Y-2P | B-277 | 20 |
| | | | N-N/A | E-208 | 30 |
| | | | | D-240 | N-N/A |

*Contact factory for projects requiring alternative battery run times, such as 10 and 20 minutes.



ELECTRICAL - INPUT

- Input voltage operating range +10 / -15%
- Input power factor correcting to 0.99.
- Frequency range 60 Hz, ±2.5 Hz.
- Input harmonic current distortion < 5% THD.
- UL1449, ANSI/IEEE C62.41 surge suppression.

ELECTRICAL - OUTPUT


- Sine wave output.
- Voltage regulation ±2%.
- Frequency regulation - synchronized to utility, free running 60 Hz, ±0.5%.
- Output voltage distortion maximum 3% THD with linear load.
- Load power factor capability 0.7 lead to 0.7 lag.
- Overload capability 125% for 10 seconds.

| Vin | Input Breaker | Input Amps | Vout | Output Amps |
|----------|---------------|------------|----------|-------------|
| 277V | 70A | 50.3A | 277V | 36.1A |
| 120/240V | 90A | 56.6A | 120/240V | 83.3/41.6A |
| 120/208V | 90A | 65.0A | 120/208V | 83.3/48.0A |
| | | | 120/277V | 83.3/36.1A |

BATTERY

- Maintenance free, sealed lead calcium battery with a design life up to 10 years, and optimum operating range of 65°F (19°C) to 85°F (30°C).¹
- 4 Stage, temperature compensated charger, 1% ripple.
- Recharge time UL924 / NFPA101 compliant (24 hours).
- Bus voltage 120VDC.

DIMENSIONS

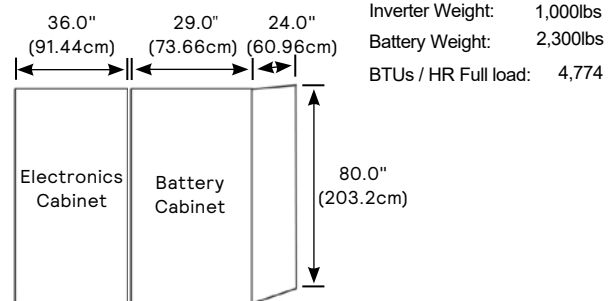

Footnote

¹ Optimum operating temperature of batteries is 77°F (25°C).
 Temperatures above 85°F (30°C) adversely impact battery life.

Check List

Catalog No: _____

VA Rating: _____

Battery Type: Maintenance free, Sealed Lead Calcium

Operating Time: 90 Min.

Input: _____ VAC, Single Phase

Output: _____ VAC, Single Phase

Output Circuit Breakers:

| | Normally | Timed Normally | Trip Alarm | |
|--------------------------------------|-----------------------------|------------------------------|------------------------------|-----------------------------|
| Qty: ___ AC Volts: _____ Amps: _____ | ON <input type="checkbox"/> | OFF <input type="checkbox"/> | YES <input type="checkbox"/> | NO <input type="checkbox"/> |
| Qty: ___ AC Volts: _____ Amps: _____ | ON <input type="checkbox"/> | OFF <input type="checkbox"/> | YES <input type="checkbox"/> | NO <input type="checkbox"/> |
| Qty: ___ AC Volts: _____ Amps: _____ | ON <input type="checkbox"/> | OFF <input type="checkbox"/> | YES <input type="checkbox"/> | NO <input type="checkbox"/> |
| Qty: ___ AC Volts: _____ Amps: _____ | ON <input type="checkbox"/> | OFF <input type="checkbox"/> | YES <input type="checkbox"/> | NO <input type="checkbox"/> |

On Site Factory Start Up (FSU) included

Optional Extended Warranty (EXT): Yes No

Description: _____

(FSU) Factory Start-Up: Includes on site start up by factory authorized technician, system training and demonstration during same site visit. Also provides 12 months of on site warranty service.

OPTIONAL (EXT) Extended Warranty: Will increase FSU on site, 12 month warranty period to a 24 month warranty period.