

Catalog Number
Notes
Type



## ILLUMINATION

- Ultra-bright, energy-efficient, long life Red or Green LEDs.

## ELECTRICAL

- Dual 120/277 voltage.
- Offers 11W of remote capacity standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and remote lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

## HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out chevron directional indicators.


## OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- HTR: Optional internal heater for cold temperature (-9°C – 50°C) applications.

## WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets CSA C22.2 No. 141-02 requirements for unit equipment.
- UL Listed for damp locations (20°C – 50°C).
- Certified to CEC under Title 20 Regulations.

## DIMENSIONS

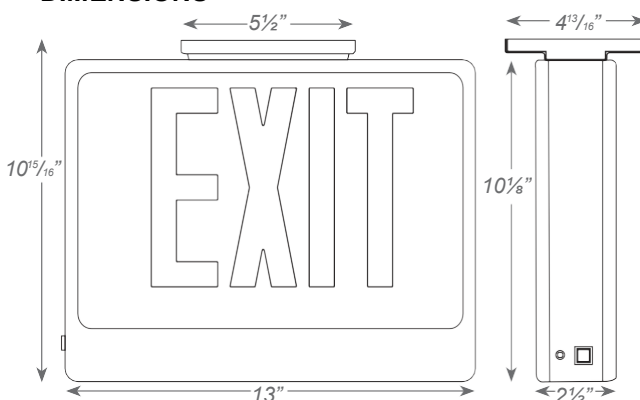

## ORDERING INFORMATION

Sample Part Number: **TER3RWEMRC**

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS	
TER	3	Universal Single/Double Face	R Red G Green W White B Black	EM Battery Backup	RC Remote Capable Standard	SDT Self-Diagnostics HTR Internal Heater

Special voltage & SALDA  
face plate options available.